
nextlight [PLUS]

SUPPLEMENTAL GREENHOUSE LIGHTING










nextlight [PLUS]

Package Contents

- 1 Fixture with Attached DC Out Power Cord (2') **x1**
- 2 Driver x1
- 3 Fixture Hooks **x2**
- 4 Driver Hooks **x2**
- 5 NextLight Pro Series Power Cord (10') x1 (see available *Power Cord Voltage Options*)
- 6 NextLight Pro Series Control Cable (20') **x1**



Power Cord Voltage Options


| | | | (\mathbf{Y}) |
|--------------|--------------|--------------|-----------------|
| 120V | 240V | 277V | 277V |
| (NEMA.5-15P) | (NEMA 6-15P) | (TWIST LOCK) | (OPEN-END/WHIP) |

Product Dimensions Fixture Dimensions

Technical Specifications

| SPECIFICATION | NEXTLIGHT PLUS PRO | |
|----------------------------|--|--|
| Operating Voltage | 120-277 VAC | |
| Operating Frequency | 50/60 Hz | |
| Input Current | 2.67A @ 120V, 1.34A @ 240V, 1.16A @ 277V | |
| PPF | 800 | |
| Energy Use | 320 Watts (305W @ 277V) | |
| PPF/Watt | 2.6 | |
| Operating Temperature | -4°F to 104°F (-20°C to 40°C) | |
| BTU Output | 1100 | |
| Fixture Dimensions (in/mm) | 28.75 x 3.5 x 4.5 / 726.7 x 85.9 x 111.7 | |
| Driver Dimensions (in/mm) | 14.75 x 5 x 2.25 / 374 x 124.4 x 54.5 | |
| Weight | 17 lbs (7.71 kg) | |
| Warranty | 5 Year Full | |
| Life Rating | Q90 > 50,000 Hours | |
| Certifications | DLC Hort, CE, UL 8800 | |
| Environment | IP65, Wet Rated | |


Driver Dimensions

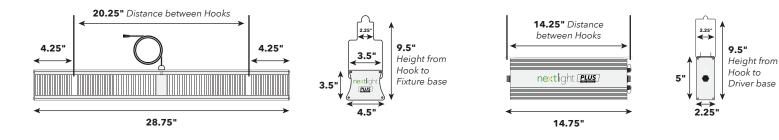

NextLight Full Spectrum LED

NextLight fixtures emit a full spectrum, bright white light which is more sun-like than even your traditional HPS. Using this spectrum you can expect tighter internodal spacing and better overall quality.

NextLight's Full Spectrum is easy to work under and provides the same sun-like qualities plants love without the negatives of high energy requirements and high heat.

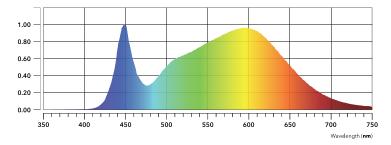

nextlight.com